
# OLDE QUARRY®

## RETAINING WALL GEOGRID SECTION

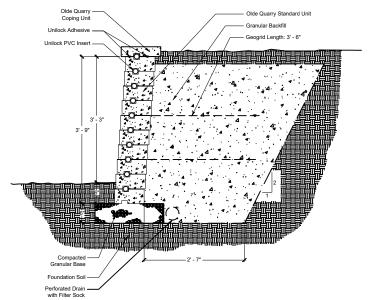

#### Design Specific Geometric Information

Retaining Wall System	Olde Quarry	Geogrid Type and Manufacturer	Stratagrid	
Maximum Height mm (in)	1143 (45)	Minimum Geogrid LTDS kN/m (lb/ft)	SG200	
Maximum Slope Above Wall	N/A	Maximum Slope Below Wall	None	
Max. Surcharge Above Wall kPa (lb/sq.ft)	None	Depth of Embedment mm (in)	153 (6)	
Batter of Wall			500 x 150 (21 x 6)	

### Design Specific Soil Information

	Soil Region						
	Infill	Retained	Foundation	Base	Drainage		
Description (by USCS)	GW	N/A	CL	GW	СР		
Effective Internal Friction Angle	37°	N/A	28°	37°	NR		
Moist Unit Weight kN/cu.m (lb/cu.ft)	22 (140)	N/A	20 (127)	22 (140)	NR		
Effective Cohesion kPa (lb/sq.ft)	NR	N/A	NR	NR	NR		
Soil Notes	Placed in 150mm (6") lifts compacted to 95% SPD.	Undisturbed soil or well compacted engineered fill.	Bearing cap. must exceed 144kPa (3000lb/sq.ft)	Free draining gravel compacted to 98% SPD.	19mm (3/4") clear stone, 300mm (12 thick min.		

NR - Not Required

#### Notes:

This cross section is intended for preliminary design purposes only. Confirm site conditions and consult with a qualified design professional or installer prior to installation.



<sup>1.</sup> Poor site conditions can affect the stability of the structure. Consult a qualified professional engineer to determine site specific construction details.