
OLDE QUARRY®

RETAINING WALL GEOGRID SECTION

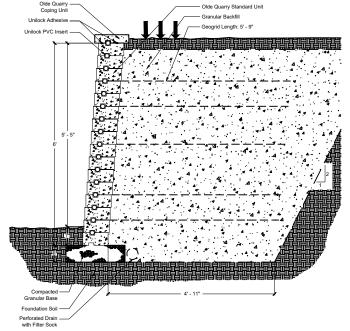

Design Specific Geometric Information

Bedight Specific Geometric Information							
Retaining Wall System	Olde Quarry	Geogrid Type and Manufacturer	Stratagrid				
Maximum Height mm (in)	1829 (72)	Minimum Geogrid LTDS kN/m (lb/ft)	Geogrid LTDS SG200				
Maximum Slope Above Wall	N/A	Maximum Slope Below Wall	None				
Max. Surcharge Above Wall kPa (lb/sq.ft)	4.8 (100)	Depth of Embedment mm (in)	153 (6)				
Batter of Wall	4°	Compacted Base Dimension mm (in)	500 x 150 (21 x 6)				

Design Specific Soil Information

	Soil Region						
	Infill	Retained	Foundation	Base	Drainage		
Description (by USCS)	GW	N/A	CL	GW	CP		
Effective Internal Friction Angle	37°	N/A	28°	37°	NR		
Moist Unit Weight kN/cu.m (lb/cu.ft)	22 (140)	N/A	20 (127)	22 (140)	NR		
Effective Cohesion kPa (lb/sq.ft)	NR	N/A	NR	NR	NR		
Soil Notes	(6") lifts compacted	Undisturbed soil or well compacted engineered fill.	Bearing cap. must exceed 144kPa (3000lb/sq.ft)	Free draining gravel compacted to 98% SPD.	19mm (3/4") clear stone, 300mm (12' thick min.		

NR - Not Required

Notes:

This cross section is intended for preliminary design purposes only. Confirm site conditions and consult with a qualified design professional or installer prior to installation.



^{1.} Poor site conditions can affect the stability of the structure. Consult a qualified professional engineer to determine site specific construction details.